


TWIST 3M1

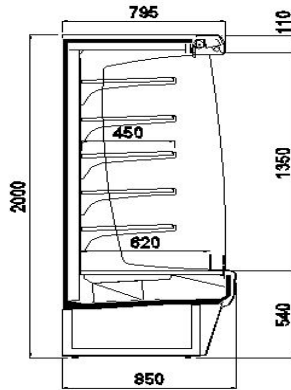


<i>Temperatura d' esercizio</i> <i>Running temperature</i> <i>Temperature de fonctionn.</i> <i>Betriebstemperatur</i> <i>Temperatura de ejercicio</i>	0°C/+2°C
---	----------

<i>Condizioni ambientali</i> <i>Ambient conditions</i> <i>Condition ambiant</i> <i>Umweltbedingungen</i> <i>Condiciones ambientales</i>	+25°C - 60% U.R.
---	------------------

Lunghezza / Length / Longueur / Lange / Largo	mm	937	1250	1875	2500
Compressore / Compressor / Compresseur / Aggregat / Compresor	Aspera	J9226GK	J9232GK	J9238GK	2 x J9232GK
Potenza frigorifera / Refrigeration duty / Puissance frigorifique / Kälteleistung / Potencia frigorifica	watt -10°C/+45°C	1928	2360	2998	4720
Potenza elettrica / Electrical power / Puissance électrique / Stromstärke / Potencia electrica	watt 230V/50Hz	929	1155	1460	2310
Consumo elettrico giornaliero / Daily electrical consumption / Consommation électrique journalière / Stromtagesverbrauch / Consumo electrico diario	KWh/24	26	31	38	54
Ventilatori condensatore / Condenser fans / Ventilateurs condensateur / Kondensator ventilator / Ventiladores condensador	nr. x watt / Ø	2 x 73W	2 x 73W	2 x 95W	4 x 73W
Ventilatori evaporatore / Evaporator fans / Ventilateurs évaporateur / Verdampfersventilator / Ventiladores evaporador	nr. x watt	1 x 32W	2 x 32W	3 x 32W	4 x 32W
Capillare / Capillary / Capillaire / Kapillare / Capilar	Ø x mm	TS 2 Or. 02	TS 2 Or. 02	TS 2 Or. 02	2xTS 2 Or. 02
Gas / Gas / Gaz / Kältemittel / Gas	R404A / gr.	1400	1700	1900	2 x 1600
Quadro elettrico / Electric control panel / Tableau électrique / Steuerung / Tablero electrónico	mod.	DIXELL	DIXELL	DIXELL	DIXELL
Numero di sbrinamenti nelle 24 h / Nr. of defrosts during 24 h / Nr. de dégivrages dans le 24 h / Abtauungsnummer während 24 st. / Nr. des descongelaciones durante las 24 h	nr. x 24h	4	4	4	4
Illuminazione / Lighting / Eclairage / Beleuchtung / Iluminación	nr. x watt	1 x 30W	1 x 36W	2 x 30W	2 x 36W
Resistenza anticondensa / Antimist heater / Resistance anti-buée / Antibeschlagheizung / Resistencia anti condensación	watt	np	np	np	np
Resistenza sbrinamento / Defrost heater / Resistance dégivrage / Abtauheizung / Resistencia de descongelación	nr. x watt	1 x 175W	1 x 210W	1 x 460W	1 x 570W
Area espositiva / Display surface / Surface d' exposition / Auslagefläche / Superficie expositiva	m ²	1,4	1,9	2,9	3,8
Volume di carico / Gross volume / Volume brut / Brutto umfang / Volumen bruto	dm ³	809	1079	1619	2158
Rumorosità / Sound level / Bruit / Geräusentwicklung / Rumorosidad	dBA	>52	>52	>52	>52
Peso / Weight / Poids / Gewicht / Peso	Kg	220	255	395	495

L'azienda si riserva il diritto di apportare modifiche tecniche senza preavviso/The company reserves the right to modify these data without advise/La société se réserve le droit d'apporter modifications techniques sans préavis/ Der Hersteller behält sich mögliche Änderungen ohne vorherige Mitteilung vor/ La sociedad se reserva el derecho de introducir modificaciones sin previo aviso

TWIST 3M2

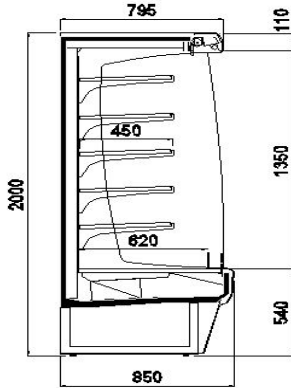


Temperatura d' esercizio Running temperature Temperature de fonctionn. Betriebstemperatur Temperatura de ejercicio	+3°C/+5°C
--	-----------

Condizioni ambientali Ambient conditions Condition ambiant Umweltbedingungen Condiciones ambientales	+25°C - 60% U.R.
--	------------------

Lunghezza / Length / Longueur / Lange / Largo	mm	937	1250	1875	2500
Compressore / Compressor / Compresseur / Aggregat / Compresor	Aspera	T6220GK	J9226GK	J9232GK	2 x J9226GK
Potenza frigorifera / Refrigeration duty / Puissance frigorifique / Kälteleistung / Potencia frigorifica	watt -10°C/+45°C	1448	1928	2360	3856
Potenza elettrica / Electrical power / Puissance électrique / Stromstärke / Potencia eléctrica	watt 230V/50Hz	816	929	1155	1858
Consumo elettrico giornaliero / Daily electrical consumption / Consommation électrique journalière / Stromtagesverbrauch / Consumo eléctrico diario	KWh/24	23	26	30	44
Ventilatori condensatore / Condenser fans / Ventilateurs condensateur / Kondensator ventilator / Ventiladores condensador	nr. x watt / Ø	2 x 73W	2 x 73W	2 x 73W	4 x 73W
Ventilatori evaporatore / Evaporator fans / Ventilateurs évaporateur / Verdampfersventilator / Ventiladores evaporador	nr. x watt	1 x 32W	2 x 32W	3 x 32W	4 x 32W
Capillare / Capillary / Capillaire / Kapillare / Capilar	Ø x mm	TS 2 Or. 02	TS 2 Or. 02	TS 2 Or. 02	2xTS 2 Or. 02
Gas / Gas / Gaz / Kältemittel / Gas	R404A / gr.	1200	1400	1700	2 x 1300
Quadro elettrico / Electric control panel / Tableau électrique / Steuerung / Tablero electrónico	mod.	DIXELL	DIXELL	DIXELL	DIXELL
Numero di sbrinamenti nelle 24 h / Nr. of defrosts during 24 h / Nr. de dégivrages dans le 24 h / Abtauungsnummer während 24 st. / Nr. des descongelaciones durante las 24 h	nr. x 24h	4	4	4	4
Illuminazione / Lighting / Eclairage / Beleuchtung / Iluminación	nr. x watt	1 x 30W	1 x 36W	2 x 30W	2 x 36W
Resistenza anticondensa / Antimist heater / Resistance anti-buée / Antibeschlagheizung / Resistencia anti condensación	watt	np	np	np	np
Resistenza sbrinamento / Defrost heater / Resistance dégivrage / Abtauheizung / Resistencia de descongelación	nr. x watt	np	np	np	np
Area espositiva / Display surface / Surface d' exposition / Auslagefläche / Superficie expositiva	m ²	1,4	1,9	2,9	3,8
Volume di carico / Gross volume / Volume brut / Brutto umfang / Volumen bruto	dm ³	809	1079	1619	2158
Rumorosità / Sound level / Bruit / Geräusentwicklung / Rumorosidad	dBA	>52	>52	>52	>52
Peso / Weight / Poids / Gewicht / Peso	Kg	220	255	395	495

L'azienda si riserva il diritto di apportare modifiche tecniche senza preavviso/The company reserves the right to modify these data without advise/La société se réserve le droit d'apporter modifications techniques sans préavis/ Der Hersteller behält sich mögliche Änderungen ohne vorherige Mitteilung vor/ La sociedad se reserva el derecho de introducir modificaciones sin previo aviso

TWIST 3H1

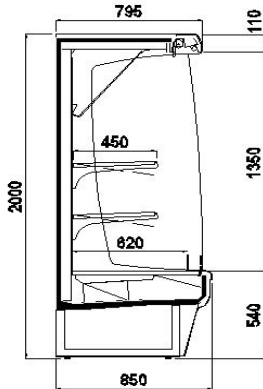

Temperatura d' esercizio Running temperature Temperature de fonctionn. Betriebstemperatur Temperatura de ejercicio	+6°C/+8°C
Condizioni ambientali Ambient conditions Condition ambiant Umweltbedingungen Condiciones ambientales	+25°C - 60% U.R.

Lunghezza / Length / Longueur / Lange / Largo	mm	937	1250	1875	2500
Compressore / Compressor / Compresseur / Aggregat / Compresor	Aspera	T6220GK	J9226GK	J9232GK	2 x J9226GK
Potenza frigorifera / Refrigeration duty / Puissance frigorifique / Kälteleistung / Potencia frigorifica	watt -10°C/+45°C	1448	1928	2360	3856
Potenza elettrica / Electrical power / Puissance électrique / Stromstärke / Potencia electrica	watt 230V/50Hz	816	929	1155	1858
Consumo elettrico giornaliero / Daily electrical consumption / Consommation électrique journalière / Stromtagesverbrauch / Consumo electrico diario	KWh/24	21	23	28	41
Ventilatori condensatore / Condenser fans / Ventilateurs condensateur / Kondensator ventilator / Ventiladores condensador	nr. x watt / Ø	2 x 73W	2 x 73W	2 x 73W	4 x 73W
Ventilatori evaporatore / Evaporator fans / Ventilateurs évaporateur / Verdampfersventilator / Ventiladores evaporador	nr. x watt	1 x 32W	2 x 32W	3 x 32W	4 x 32W
Capillare / Capillary / Capillaire / Kapillare / Capilar	Ø x mm	TS 2 Or. 02	TS 2 Or. 02	TS 2 Or. 02	TS 2 Or. 02
Gas / Gas / Gaz / Kältemittel / Gas	R404A / gr.	1200	1400	1700	2 x 1300
Quadro elettrico / Electric control panel / Tableau électrique / Steuerung / Tablero electrónico	mod.	DIXELL	DIXELL	DIXELL	DIXELL
Numero di sbrinamenti nelle 24 h / Nr. of defrosts during 24 h / Nr. de dégivrages dans le 24 h / Abtaunungsnummer während 24 st. / Nr. des descongelaciones durante las 24 h	nr. x 24h	4	4	4	4
Illuminazione / Lighting / Eclairage / Beleuchtung / Iluminación	nr. x watt	1 x 30W	1 x 36W	2 x 30W	2 x 36W
Resistenza anticondensa / Antimist heater / Resistance anti-buée / Antibeschlagheizung / Resistencia anti condensación	watt	np	np	np	np
Resistenza sbrinamento / Defrost heater / Resistance dégivrage / Abtauheizung / Resistencia de descongelación	nr. x watt	np	np	np	np
Area espositiva / Display surface / Surface d' exposition / Auslagefläche / Superficie expositiva	m ²	1,4	1,9	2,9	3,8
Volume di carico / Gross volume / Volume brut / Brutto umfang / Volumen bruto	dm ³	809	1079	1619	2158
Rumorosità / Sound level / Bruit / Geräusentwicklung / Rumorosidad	dBA	>52	>52	>52	>52
Peso / Weight / Poids / Gewicht / Peso	Kg				

L' azienda si riserva il diritto di apportare modifiche tecniche senza preavviso / The company reserves the right to modify these data without advise / La société se réserve le droit d' apporter modifications techniques sans préavis / Der Hersteller behält sich mögliche Änderungen ohne vorherige Mitteilung vor / La sociedad se reserva el derecho de introducir modificaciones sin previo aviso