


Modular Flake-Ice Machine up to 120 Kg



ABS plastic cover




Stainless Steel



Electronic Controls



MF 26 + B193
(sold separately)



MF 26 + B393 + KBT103
(sold separately)



MF 26 + B550 + KBT1
(sold separately)



MF 26 + RB400
(sold separately)

Features

- Modular Flake-ice machine, production up to 120 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in ABS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, contains 25% residual water content, hence very rich in moisture.
- CFC-free R 134a Refrigerant

MF 26 Technologies



| | | | | | | |
|----------|--|-----------|-------|-----------|-------|--|
| | | | | | | |
| | | 10°: 10°C | | 21°: 15°C | | |
| MF 26 AS | | [kg] | [lbs] | [kg] | [lbs] | [WxDxH mm] 564x536x531 |
| MF 26 WS | | 120 | 264 | 110 | 242 | [WxDxH inches] 22 3/16" x 21 1/8" x 20 7/8" |
| | | 120 | 264 | 106 | 234 | [v/Hz/ph] 230/50/1 |
| | | | | | | R 134 a |

This product qualifies for the following listings:



Residual water content 25%

Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Modular Flake-Ice Machine up to 120 Kg

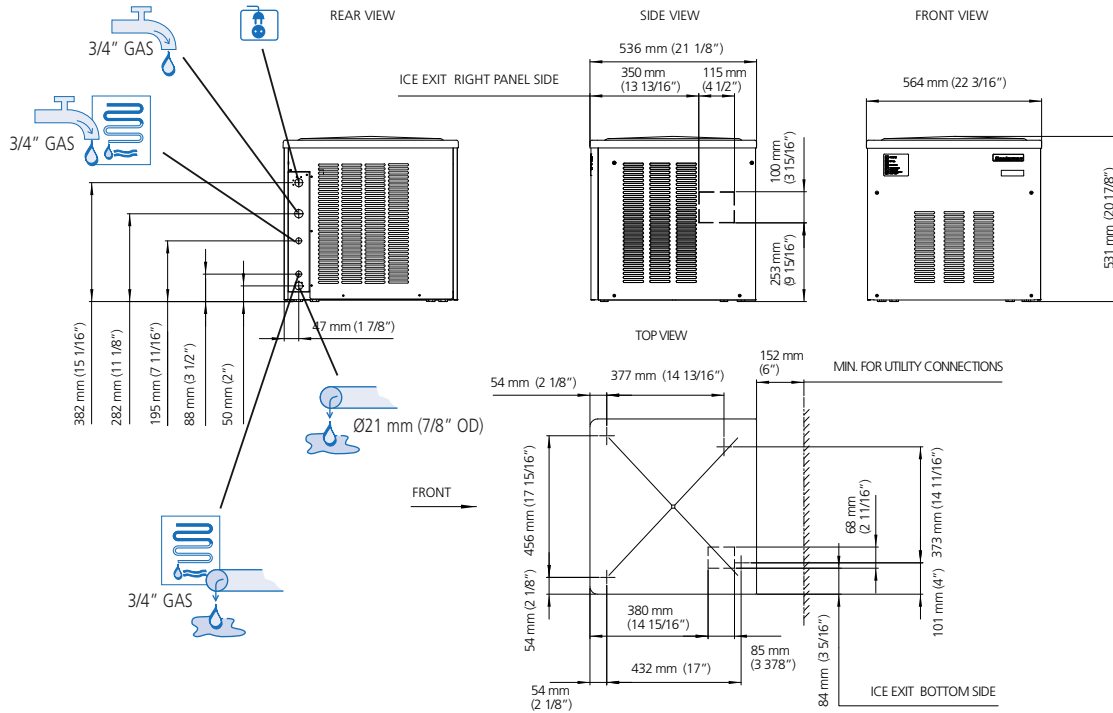

MF 26 AIR COOLED

| °C \ °F | 50° 10° | 60° 15° | 70° 21° | 90° 32° | |
|---------|------------|------------|------------|------------|-----|
| 10° | 120 | 116 | 112 | 104 | kg |
| 50° | 264 | 256 | 247 | 229 | lbs |
| 21° | 114 | 110 | 106 | 98 | kg |
| 70° | 251 | 242 | 234 | 216 | lbs |
| 32° | 103 | 99 | 95 | 87 | kg |
| 90° | 227 | 218 | 209 | 192 | lbs |
| 38° | 96 | 92 | 88 | 80 | kg |
| 100 | 212 | 203 | 194 | 176 | lbs |



MF 26 WATER COOLED

| °C \ °F | 50° 10° | 60° 15° | 70° 21° | 90° 32° | |
|---------|------------|------------|------------|------------|-----|
| 10° | 120 | 116 | 112 | 104 | kg |
| 50° | 264 | 256 | 247 | 229 | lbs |
| 21° | 110 | 106 | 102 | 94 | kg |
| 70° | 242 | 234 | 225 | 207 | lbs |
| 32° | 105 | 101 | 97 | 89 | kg |
| 90° | 231 | 223 | 214 | 196 | lbs |
| 38° | 103 | 99 | 95 | 87 | kg |
| 100 | 227 | 218 | 209 | 192 | lbs |



Minimum

10°C (50°F)



Maximum

40°C (104°F)

5°C (41°F)

35°C (95°F)

-10%

+10%

1 BAR
14 psi

5 BAR
70 psi

| | Icon | Value | Icon | Value | Icon | Value | Icon | Value | Icon | Value | Icon | Value |
|----------|--------------|-----------------------|-----------------------------|---------|-----------|---------------------|----------|-------------|------------------|-------------------|------|-------|
| MF 26 AS | Air Cooled | 4090 1200 [Btu/h] [W] | 3 x 1,5 [Ømm ²] | 500 [W] | 10 A FUSE | 11.6 [kWh] - 100 Kg | 4 [l/h] | 1 [gal/h] | 45 [kg] 99 [lbs] | 52 [kg] 115 [lbs] | | |
| MF 26 WS | Water Cooled | 4090 1200 [Btu/h] [W] | 3 x 1,5 [Ømm ²] | 500 [W] | 10 A FUSE | 11.3 [kWh] - 100 Kg | 29 [l/h] | 7,6 [gal/h] | 45 [kg] 99 [lbs] | 52 [kg] 115 [lbs] | | |

CONTACT POINTS:

Europe
 Scotsman Europe-Frimont S.p.A.
 Via Puccini, 22
 20010 Pogliano (Milano) Italy
 Ph: (+39) 02-93960208
 Fax: (+39) 02-93960201
 scotsman.europe@frimont.it

Asia and Pacific
 Scotsman Ice Systems
 Frimont S.p.A. (R.O.)
 1 Commonwealth Lane #09-22
 One Commonwealth
 Singapore 149544
 Ph: (+65) 6738 5393
 Fax: (+65) 6738 1959
 scotsman@scotsman.com.sg

China
 Scotsman Ice Systems (Shanghai)
 Room 2503, Building 2
 20 Xuhong Middle Road, Xuhui District
 Shanghai China 200235
 Main line: (+86) 21 61313200
 Fax: (+86) 21 61313330
 scotsman.shanghai@scotsman-china.com

Middle East & N. Africa
 Scotsman-Frimont Regional Office (ME&NA)
 POBox: 42026, HFZA Sharjah, UAE
 Ph: (+97)16 5262 944-16 5262 945
 Fax: (+97)165262946
 Mob. Ph: (+97)1505505980
 Skype: mdawood331393
 m.dawood@frimont.ae
 fernando.m@frimont.ae

South Africa
 Scotsman SA (Pty) Ltd - Ice Systems (Pty) Ltd
 P.O. Box 44 - Riverclub - 2149
 Lakeview Business Park
 Unit 4, 8 - 10 Yaldwyn Road - Jetpark, Boksburg
 Ph: (+27) 010 590 0609
 (+27) 087 720 0245 / 6 / 7 / 8
 Fax: (+27) 11 826 4123 - (+27) 086 634 0803
 stuart@scotsmansa.co.za
 jennifer@scotsmansa.co.za

Spain
 Scotsman España, S.L.U. c/ Galapagar, 12
 Poligono Industrial Ventorro del Cano
 28925 Alcorcon (Madrid)
 Ph: (+34)91-1109796
 Fax: (+34)91-6337423
 scotsman@scotsman-espana.es
 www.scotsman-espana.es